

Léopardieur

Tour 2009

Lighting
48 dimmers version

Control:

- 42 dimmers minimum
- DMX light control board 48/96 + Submasters (by preference, MA Light commander)
- control board in front of the stage (not on backstage or side)
- FOH lighting controllable from the board

Spots:

- 9 PC 1Kw
- 22 PAR 64 1Kw CP62
- 1 PAR 64 1Kw CP60
- 6 profile 13-42° 1Kw type Robert Juliat 614 S or SX
- 2 profile 29-50° 2Kw type Robert Juliat 713 S or SX with gobo holders
- 4 asymmetrical cyclorama lights 1Kw
- 5 F1 or PAR 36 VNSP
- 2 ACL couples (4 bars)
- 2 T8 blinder couples (4 bars)
- 4 scans 250 or 500 W with adapted controller (by preference, MA Scan commander)

Accessories:

- 8 lighting stands h. 1m80 (6 feet)
- 4 floor mounts
- floor mounts for the floor ACL, the ideal type is 2 x 2 meters of 300 or 500mm truss (the purpose is to raise the height of the ACL).

Page 1 of 6

Contacts:

Light: Camille Flavignard +33(0)6 22 95 31 96 camillefla@hotmail.com
Stage manager: Bruno Pillon +33(0)6 89 15 25 25 bruno@leopardieur.com

Filters: (ref. Lee Filters)

- PAR:
 - 4 x 026
 - 4 x 021
 - 4 x 120
 - 4 x 180
 - 2 x 179
 - 2 x 117
 - 2 x 170
- PC:
 - 5 x 170
 - 8 x 151
- Asymmetrical cyc:
 - 2 x 119
 - 2 x 106





Fog:

- 1 Fog generator with electric fan or:
 - smoke salt with electric fan
- No smoke machine, thank you!*

Please send us your technical informations and your light manager's contact, so we can, if necessary, adapt our lighting plan. Do not hesitate to contact the light or stage manager, there's always a solution!

Contacts:

Light: Camille Flavignard +33(0)6 22 95 31 96 camillefla@hotmail.com
Stage manager: Bruno Pillon +33(0)6 89 15 25 25 bruno@leoparleur.com

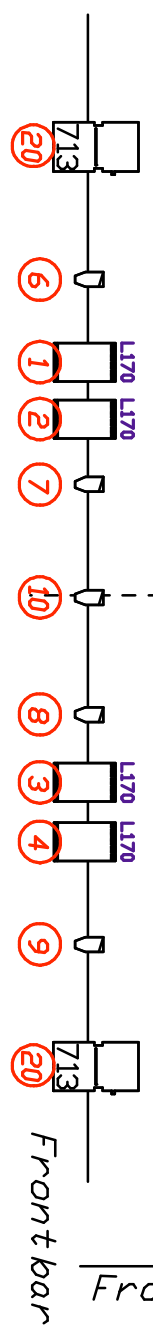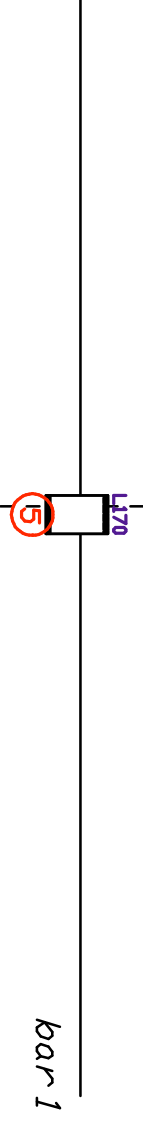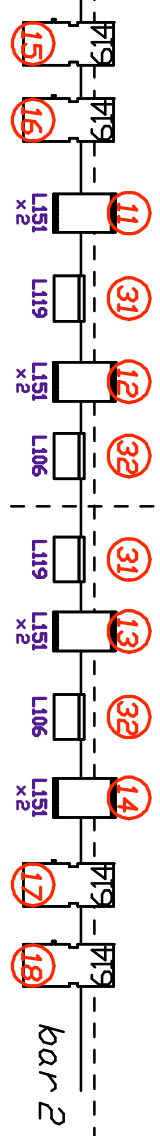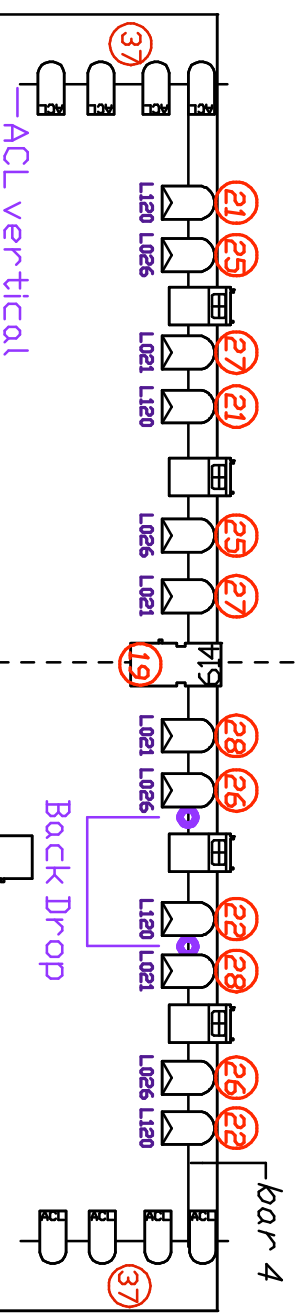

stage 10x7m

kar 1

kar 3

- bar 4

PAR641KW CP62

PC1KW

Profile 1KW 13-42° type 614

Profile 2KW 29-50° type 713

asymmetrical cyc1KW

vertical ACL bar

Scan 250

channel

Lee Filters reference

Back Drop

(Bck Dpenv. 3,5 x 1,2 m)

Léopard



Tour 2009

GRILL PLOT

contact

Camille Flavignard +33(0)6 22 95 31 96 camillefla@hotmail.com

Bruno Pillon +33(0)6 89 15 25 25 bruno@leopar.leur.com

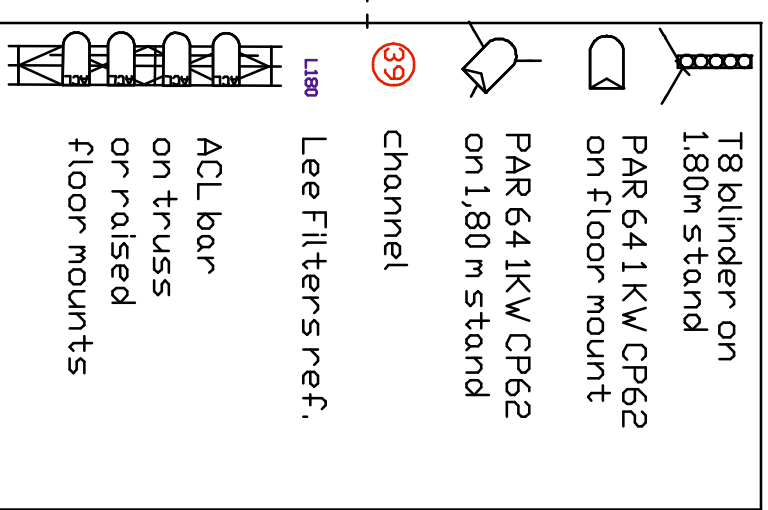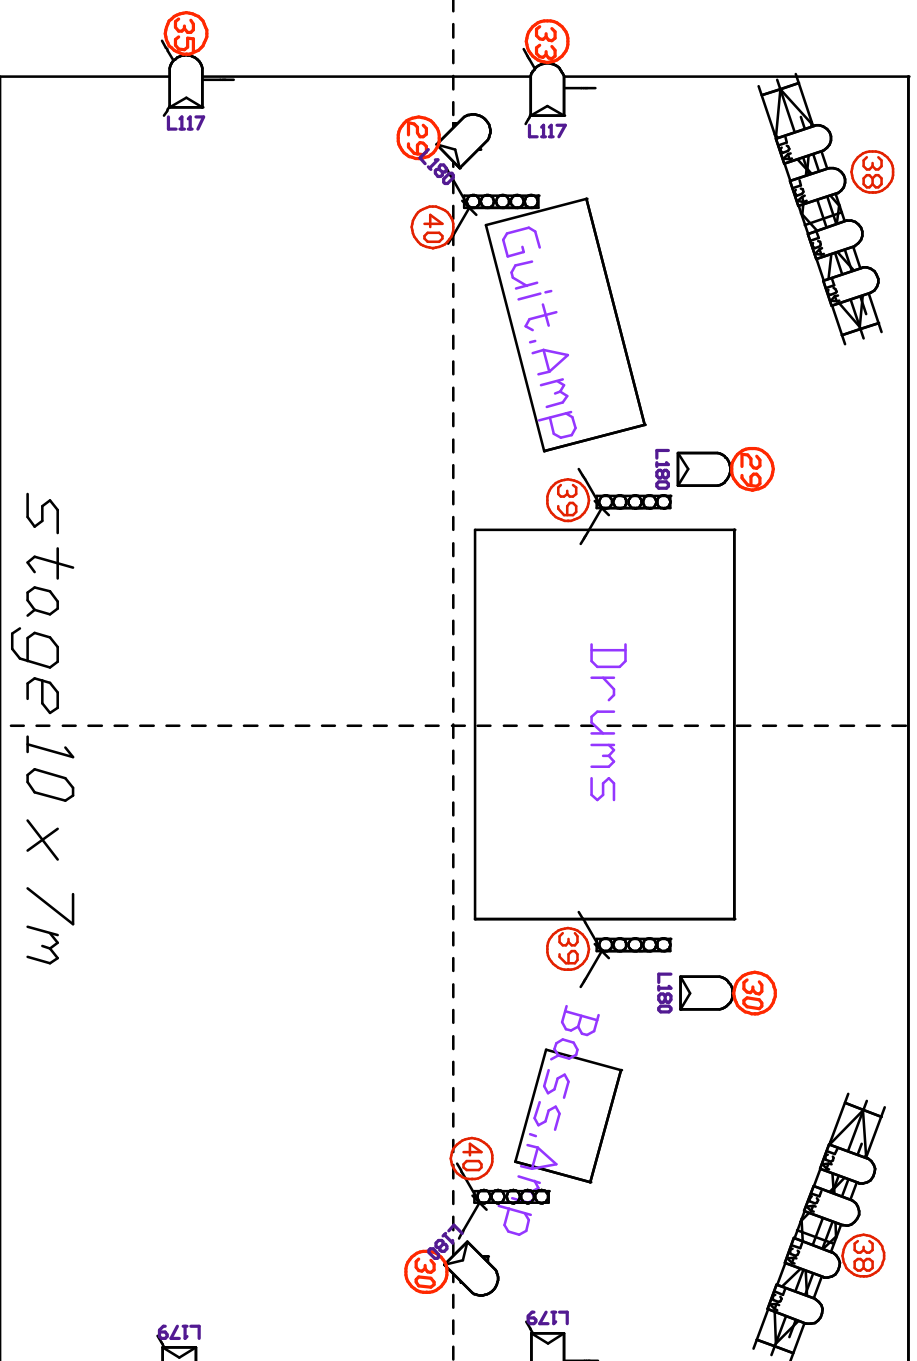

Léoparleur

Tour 2009

FLOORPLOT

contact

Camille Flavignard +33(0)6 22 95 31 96 camillefla@hotmail.com
 Bruno Pillon +33(0)6 89 15 25 25 bruno@leoparleur.com

LéOparleur

Tour 2009

Feuille de Patch

Version 48 circuits

Ch	Dim.	Proj	Position	Function	Gel/Gobo	Access.	Watts
1		PC 1 KW	Front Bar	Frontlight Simon (acc)	Lee 170		1000
2		PC 1 KW	Front Bar	Frontlight Jo (guit)	Lee 170		1000
3		PC 1 KW	Front Bar	Frontlight Maya (sax)	Lee 170		1000
4		PC 1 KW	Front Bar	Frontlight Adrien (bass)	Lee 170		1000
5		PC 1 KW	Bar 1	Frontlight Jean (drums)	Lee 170		1000
6		F1 (PAR 36)	Front Bar	Frontlight Simon (acc)	W		30
7		F1 (PAR 36)	Front Bar	Frontlight Jo (guit)	W		30
8		F1 (PAR 36)	Front Bar	Frontlight Maya (sax)	W		30
9		F1 (PAR 36)	Front Bar	Frontlight Adrien (bass)	W		30
10		F1 (PAR 36)	Front Bar	Frontlight Jean (drums)	W		30
11		PC 1 KW	Bar 2	Backlight Simon	Lee 151 x 2		1000
12		PC 1 KW	Bar 2	Backlight Jo	Lee 151 x 2		1000
13		PC 1 KW	Bar 2	Backlight Maya	Lee 151 x 2		1000
14		PC 1 KW	Bar 2	Backlight Adrien	Lee 151 x 2		1000
15		Profile 1 KW	Bar 2	Profile Simon	W		1000
16		Profile 1 KW	Bar 2	Profile Jo	W		1000
17		Profile 1 KW	Bar 2	Profile Maya	W		1000
18		Profile 1 KW	Bar 2	Profile Adrien	W		1000
19		Profile 1 KW	Bar 4	Profile Jean	W		1000
20		2 Profiles 29-50° 2 KW	Front Bar	gobos	W + Gobo	2 gobo holders	4000
21		2 PAR CP62	Bar 4	Blue Backlight	Lee 120		2000
22		2 PAR CP62	Bar 4	Blue Backlight	Lee 120		2000
23							
24							
25		2 PAR CP62	Bar 4	Red Backlight	Lee 026		2000

Contacts:

Régie Lumière: Camille Flavignard +33(0)6 22 95 31 96 camillefla@hotmail.com

Régie Générale: Bruno Pillon +33(0)6 89 15 25 25 bruno@leoparleur.com

Pages 5 et 6 sur 6

LéOparleur

Tour 2009

Feuille de Patch

Version 48 circuits

26		2 PAR CP62	Bar 4	Red Backlight	Lee 026		2000
27		2 PAR CP62	Bar 4	Orange Backlight	Lee 021		2000
28		2 PAR CP62	Bar 4	Orange Backlight	Lee 021		2000
29		2 PAR CP62	Floor/Stage right	Purple Backlight	Lee 180	Floor mounts	2000
30		2 PAR CP62	Floor/Stage Left	Purple Backlight	Lee 180	Floor mounts	2000
31		2 Asymmetrical cyc 1KW	Bar 2	Blue	Lee 119		2000
32		2 Asymmetrical cyc 1KW	Bar 2	Red	Lee 106		2000
33		PAR CP 62	Floor/Up right	Green Sidelight	Lee 117	Lighting Stand	1000
34		PAR CP 62	Floor/Up left	Yellow Sidelight	Lee 179	Lighting Stand	1000
35		PAR CP 62	Floor/Downstage right	Green Sidelight	Lee 117	Lighting Stand	1000
36		PAR CP 62	Floor/Downstage left	Yellow Sidelight	Lee 179	Lighting Stand	1000
37		ACL	Bar 4	Vertical ACL	W		2000
38		ACL	Floor	Floor ACL	W	Floor stand/Truss	2000
39		T8	Floor/middle	Blinder	W	Lighting Stand	1200
40		T8	Floor/sides	Blinder	W	Lighting Stand	1200
41							
42		Profile 1 KW	Bar 3	Profile Back Drop	W	shapes	1000
43		2 PAR CP62	Front side bar	Proscenium	Lee 170		2000
44		PAR CP60	Front side bar	Solos	W		2000

Contacts:

Régie Lumière: Camille Flavignard +33(0)6 22 95 31 96 camillefla@hotmail.com

Régie Générale: Bruno Pillon +33(0)6 89 15 25 25 bruno@leoparleur.com

Pages 5 et 6 sur 6